

6647W/6647WU/6655W/6655WU Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Contents

Product Description, Lens Specs, Screen/Aspect Ratio	
Notes	Pg 1
Distance Charts and Formulas	Pg 2-3
Ceiling Mount/Desktop Installation	Pg 4
Lens Shift Adjustable Range	Pg 5
Cabinet Dimensions	Pg 6-7
Ceiling Mount Dimensions and Input Panel	Pg 8
Control Codes	Pg 9



Product Description

Type:	3 panel LCD projector, 0.64 p-Si TFT w/MLA	Dimensions: 16.52"(W) x 5.54"(H) x 12.95"(D)	Weight: 10.6 lbs
Resolution:	6647W: 1280 x 800 (16:10) 6647WU: 1920 x 1200 (16:10) 6655W: 1280 x 800 (16:10) 6655WU: 1920 x 1200 (16:10)	Brightness:	6647W: 4700 Lumens 6647WU: 4700 Lumens 6655W: 5500 Lumens 6655WU: 5500 Lumens
Fan Noise:	39 dB / 33dB @ 1 meter	BTU's:	6647W: 1426.3 BTU/hour (max) 6647WU: 1446.7 BTU/hour (max) 6655W: 1528.6 BTU/hour (max) 6655WU: 1559.3 BTU/hour (max)
Power Consumption:	6647W: 418W (max) 6647WU: 424W (max) 6655W: 448W (max) 6655WU: 460W (max)		

Network Ready, integrated wired and wireless adapter
Manual: Lens Shift, Horizontal & Vertical /Zoom/ Focus

Lens Specifications

Throw Ratio:	6647W/6655W: 1.2 – 2.1:1 (for 100" diagonal) 6647WU/6655WU: 1.2 – 2.0:1 (for 100" diagonal)	Focal Length:	17.4mm – 29.0mm 17.2mm – 27.7mm
Offset Angle:	4.8° - 8.0° (for 100" diagonal)	F/#:	1.7 – 2.2 1.5 – 2.1
Screen Sizes:	30" - 300" diagonal	Manual Focus/Manual Zoom/Manual Lens Shift	

Screen/Aspect Ratio

4:3, 16:9 and 16:10 screens are fully supported with proper aspect ratio control for both type sources using developed scaling technology. Menu selections have settings for each screen type and aspect ratio control for each source type.

Notes

- For screen sizes not indicated on the projection tables, use the formulas below.
If the figures on the tables do not match the results of formulas, use the figures in the table..
- Distances are in inches, for millimeters multiply by 25.4.
- Distances may vary ±5%.

DUKANE CORP AV SERVICE DEPT
2900 Dukane Drive
St Charles, IL 60174
800-676-2487 / 630-762-4032
Fax 630-584-5156
avservice@dukane.com
www.dukaneav.com

6647W/6647WU/6655W/6655WU Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Formulas: 16:10 Aspect Ratio (6647W/6655W—WXGA)

The Projection Formulas use the image width for calculation. Image width is the same for all aspect ratios, only vertical image size varies. For proper projector placement, determine the image width for a desired screen size. Use the Screen Formulas below to calculate all screen dimensions. Plug in the image width for “W” in the Projection Formulas.

Refer to the diagrams and charts for popular screen sizes on page 4:

16:10 Screen Formulas:

$$W = H \times 16/10$$

$$H = W \times 10/16$$

$$\text{Screen Diagonal} = W \times 18.868/16$$

Projection Formulas:

$$B \text{ (max)} = 0.347W$$

$$B \text{ (min)} = 0$$

$$C \text{ (wide)} = 1.263W - 3.138$$

$$C \text{ (tele)} = 2.264W - 3.138$$

$$D \text{ (max)} = -0.053W$$

$$D \text{ (min)} = 0.313W$$

$$\alpha \text{ (wide)} = \tan^{-1} (B/C(\text{wide}))$$

$$\alpha \text{ (tele)} = \tan^{-1} (B/C(\text{tele}))$$

$$\text{Lens Shift Max (Right)} = 0.15W$$

$$\text{Lens Shift Max (Left)} = 0.-15W$$

Note: For screen sizes not indicated on the projection tables, use the formulas on page 1.

Distance Charts

The following shows the proper relative positions of the projector and screen. Refer to the table to determine the position of installation. Distances are in inches. For millimeters multiply by 25.4.

Screen Size (16:10)			B max - min	C wide - tele	D max - min	α wide - tele	Lens Shift	
Diagonal	Width(W)	Height (H)					Max (Right)	Max (Left)
inches	inches	inches	inches	inches	inches	degrees	inches	
57	48	30	17 - 0	57 - 106	-2 - 15	16.2 - 9.0	7.2	-7.2
66	56	35	19 - 0	68 - 124	-2 - 18	16.0 - 8.9	8	-8
68	58	36	20 - 0	70 - 127	-2 - 18	16.0 - 8.9	9	-9
75	64	40	22 - 0	78 - 142	-2 - 20	16.0 - 8.9	10	-10
79	67	42	23 - 0	82 - 149	-2 - 21	15.9 - 8.9	10	-10
85	72	45	25 - 0	88 - 160	-3 - 23	15.9 - 8.9	11	-11
92	78	49	27 - 0	96 - 174	-3 - 25	15.8 - 8.9	12	-12
98	83	52	29 - 0	102 - 185	-3 - 26	15.8 - 8.9	12	-12
102	86	54	30 - 0	106 - 192	-3 - 27	15.8 - 8.9	13	-13
111	94	59	33 - 0	116 - 211	-3 - 30	15.8 - 8.8	14	-14
113	96	60	33 - 0	118 - 214	-3 - 30	15.8 - 8.8	14	-14
123	104	65	36 - 0	128 - 232	-4 - 33	15.7 - 8.8	16	-16
125	106	66	37 - 0	130 - 236	-4 - 33	15.7 - 8.8	16	-16
147	125	78	43 - 0	154 - 279	-4 - 39	15.7 - 8.8	19	-19
149	126	79	44 - 0	157 - 283	-4 - 40	15.7 - 8.8	19	-19
213	181	113	63 - 0	225 - 406	-6 - 57	15.6 - 8.8	27	-27
255	216	135	75 - 0	270 - 486	-8 - 68	15.5 - 8.8	32	-32
270	229	143	79 - 0	286 - 515	-8 - 72	15.5 - 8.8	34	-34
300	254	159	88 - 0	318 - 573	-9 - 80	15.5 - 8.8	38	-38

6647W/6647WU/6655W/6655WU Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Formulas: 16:10 Aspect Ratio (6647WU/6655WU—WUXGA)

The Projection Formulas use the image width for calculation. Image width is the same for all aspect ratios, only vertical image size varies. For proper projector placement, determine the image width for a desired screen size. Use the Screen Formulas below to calculate all screen dimensions. Plug in the image width for “W” in the Projection Formulas.

Refer to the diagrams and charts for popular screen sizes on page 4:

16:10 Screen Formulas:

$$W = H \times 16/10$$

$$H = W \times 10/16$$

$$\text{Screen Diagonal} = W \times 18.868/16$$

Projection Formulas:

$$B (\text{max}) = 0.347W$$

$$B (\text{min}) = 0$$

$$C (\text{wide}) = 1.238W - 1.818$$

$$C (\text{tele}) = 1.999W - 1.727$$

$$D (\text{max}) = -0.053W$$

$$D (\text{min}) = 0.313W$$

$$\alpha (\text{wide}) = \tan^{-1} (B/C(\text{wide}))$$

$$\alpha (\text{tele}) = \tan^{-1} (B/C(\text{tele}))$$

$$\text{Lens Shift Max (Right)} = 0.15W$$

$$\text{Lens Shift Max (Left)} = 0.-15W$$

Note: For screen sizes not indicated on the projection tables, use the formulas on page 1.

Distance Charts

The following shows the proper relative positions of the projector and screen. Refer to the table to determine the position of installation. Distances are in inches. For millimeters multiply by 25.4.


Screen Size (16:10)			B max - min	C wide - tele	D max - min	α wide - tele	Lens Shift	
Diagonal	Width(W)	Height (H)					Max (Right)	Max (Left)
inches	inches	inches	inches	inches	inches	degrees	inches	
57	48	30	17 - 0	58 - 94	-2 - 15	16.1 - 10.0	7.2	-7.2
66	56	35	19 - 0	68 - 110	-2 - 18	16.1 - 10.0	8	-8
68	58	36	20 - 0	69 - 113	-2 - 18	16.0 - 10.0	9	-9
75	64	40	22 - 0	77 - 126	-2 - 20	16.0 - 10.0	10	-10
79	67	42	23 - 0	81 - 133	-2 - 21	16.0 - 10.0	10	-10
85	72	45	25 - 0	87 - 142	-3 - 23	16.0 - 10.0	11	-11
92	78	49	27 - 0	95 - 155	-3 - 25	15.9 - 10.0	12	-12
98	83	52	29 - 0	101 - 165	-3 - 26	15.9 - 9.9	12	-12
102	86	54	30 - 0	105 - 171	-3 - 27	15.9 - 9.9	13	-13
111	94	59	33 - 0	115 - 187	-3 - 30	15.9 - 9.9	14	-14
113	96	60	33 - 0	117 - 190	-3 - 30	15.9 - 9.9	14	-14
123	104	65	36 - 0	127 - 206	-4 - 33	15.9 - 9.9	16	-16
125	106	66	37 - 0	129 - 209	-4 - 33	15.9 - 9.9	16	-16
147	125	78	43 - 0	153 - 248	-4 - 39	15.8 - 9.9	19	-19
149	126	79	44 - 0	155 - 251	-4 - 40	15.8 - 9.9	19	-19
213	181	113	63 - 0	222 - 360	-6 - 57	15.8 - 9.9	27	-27
255	216	135	75 - 0	266 - 430	-8 - 68	15.8 - 9.9	32	-32
270	229	143	79 - 0	281 - 456	-8 - 72	15.8 - 9.9	34	-34
300	254	159	88 - 0	313 - 507	-9 - 80	15.7 - 9.9	38	-38

6647W/6647WU/6655W/6655WU Installation Guide


Desktop and Ceiling Mount

Rev 1.0

Ceiling Mounted

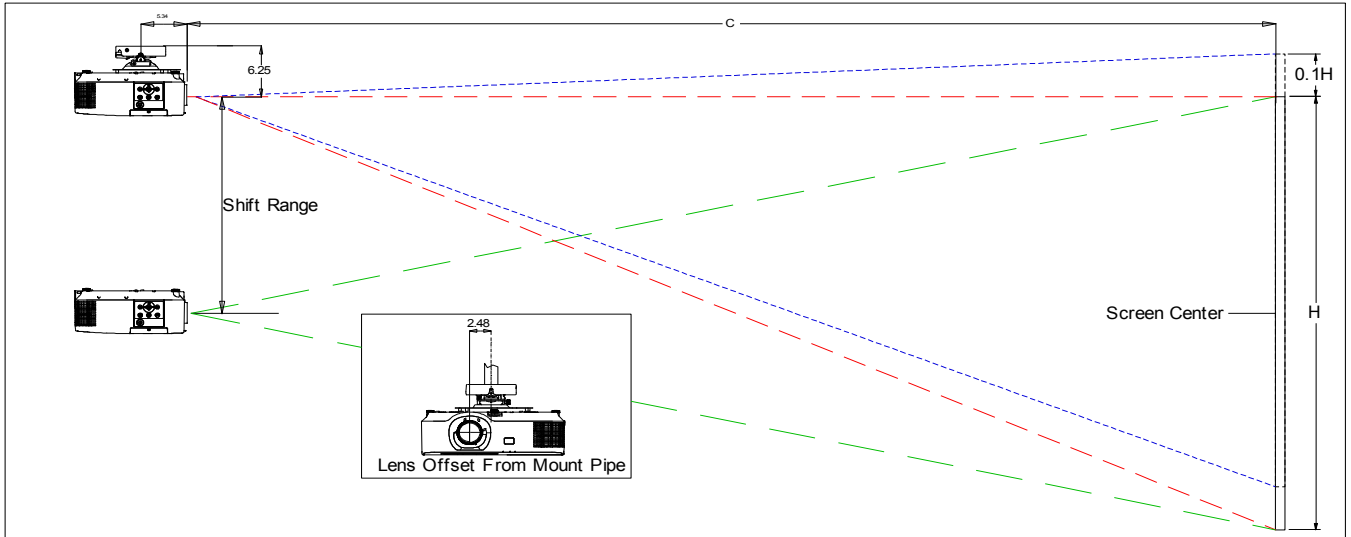

Desktop

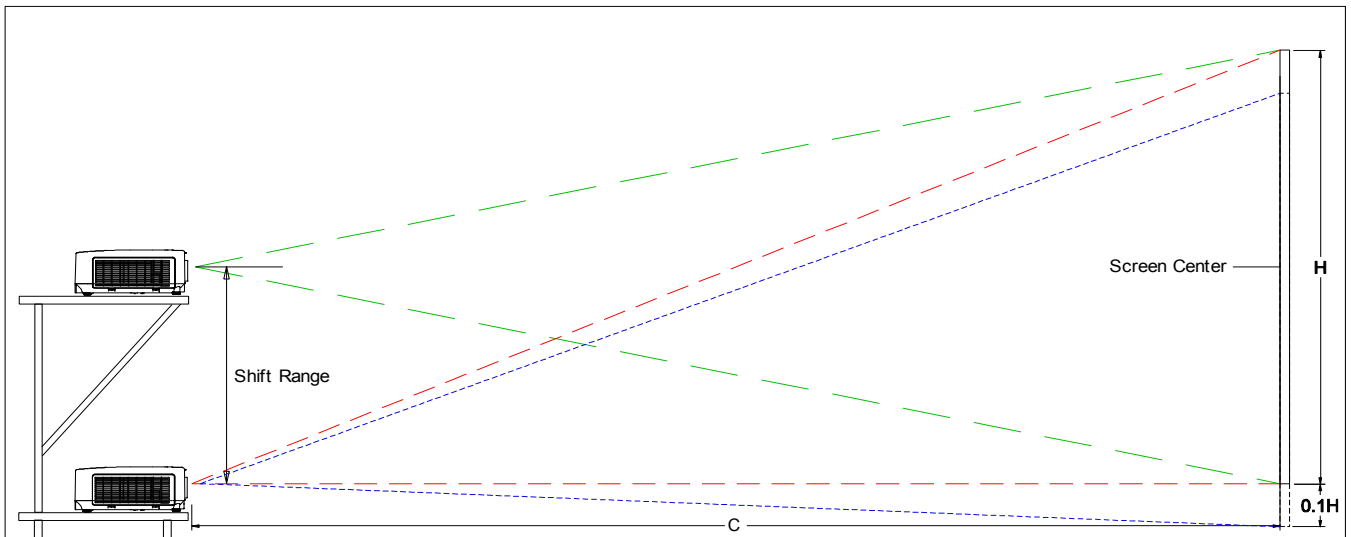

6647W/6647WU/6655W/6655WU Installation Guide


Desktop and Ceiling Mount

Rev 1.0

Lens Shift Adjustable Range

Lens Shift Range for Desktop and Ceiling Mount Application

The diagram below shows the location of the image position in the lens for the 6647W/6655W. The 6647W/6655W has a maximum horizontal lens shift range of +/- 15% and a maximum vertical lens shift of + 55%. The lens can be shifted within the shaded area as shown using the normal projection position as a starting point.

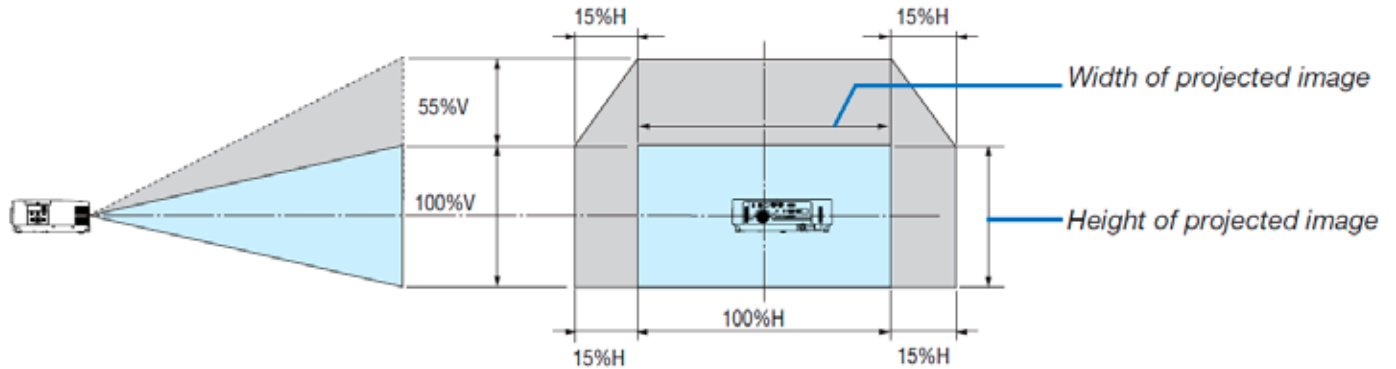

Lens Shift Range for Desktop and Ceiling Mount Application

The diagram below shows the location of the image position in the lens for the 6647WU/6655WU. The 6647WU/6655WU has a maximum horizontal lens shift range of +/- 25% and a maximum vertical lens shift of + 62%. The lens can be shifted within the shaded area as shown using the normal projection position as a starting point.

Note: Projector is set out of the box at center position, which is how it is depicted above.
(H: width of projected image, V: height of projected image)


6647W/6647WU/6655W/6655WU Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Cabinet Dimensions

The following diagrams show the cabinet dimensions for the 6647W/6647WU/6655W/6655WU. Dimensions are in inches. For millimeters multiply by 25.4.

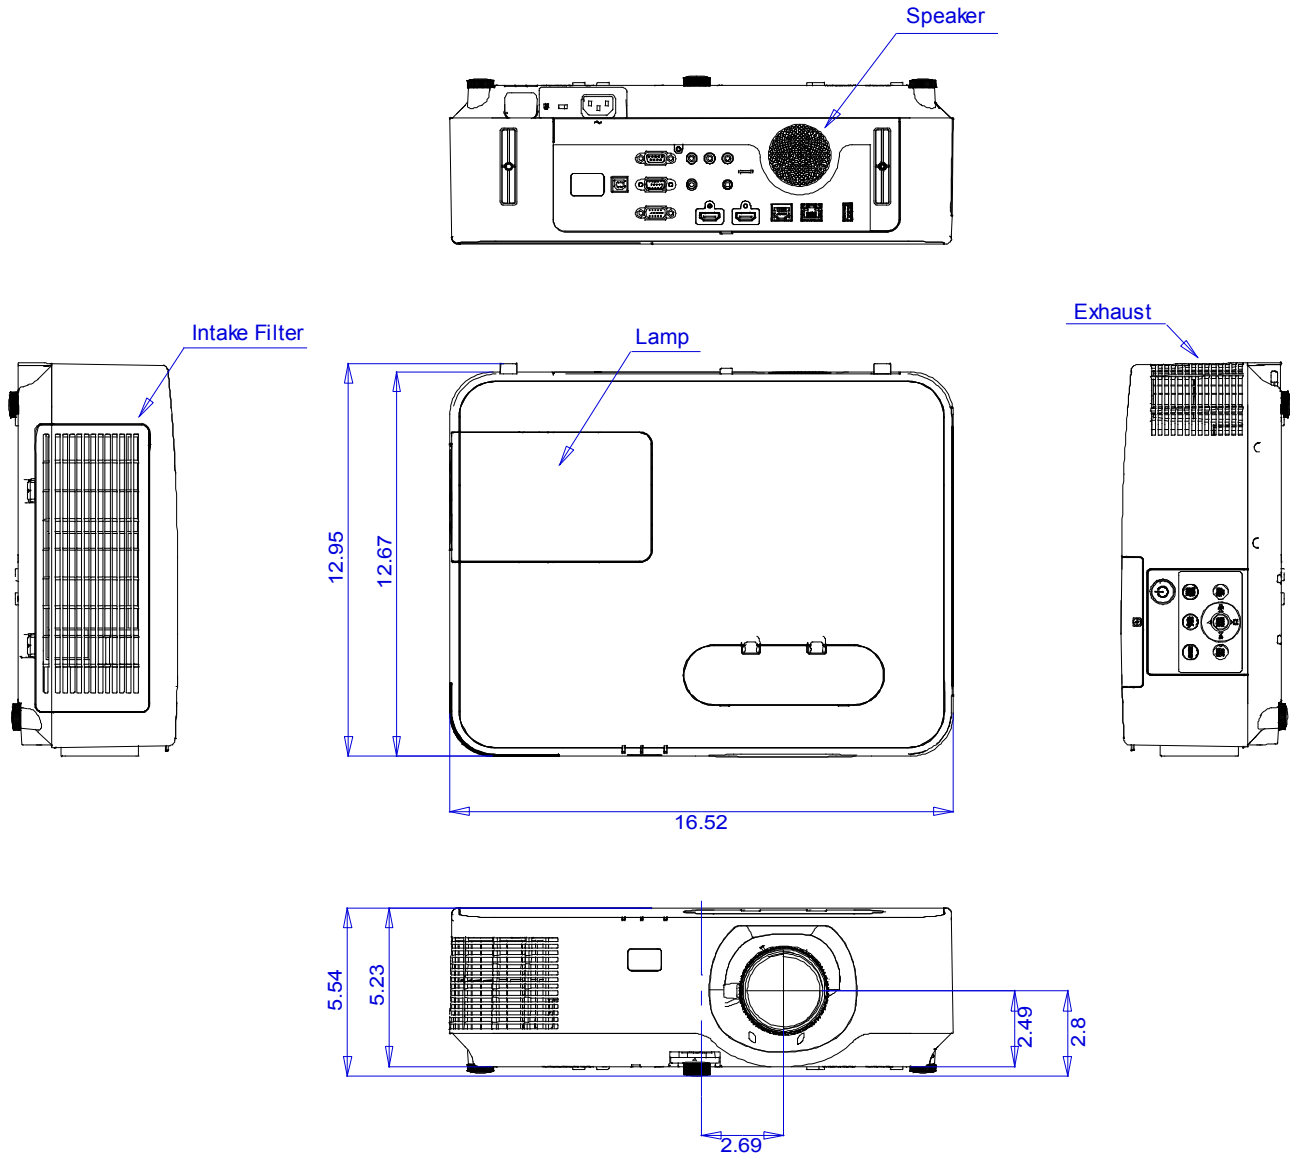


6647W/6647WU/6655W/6655WU Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Cabinet Dimensions

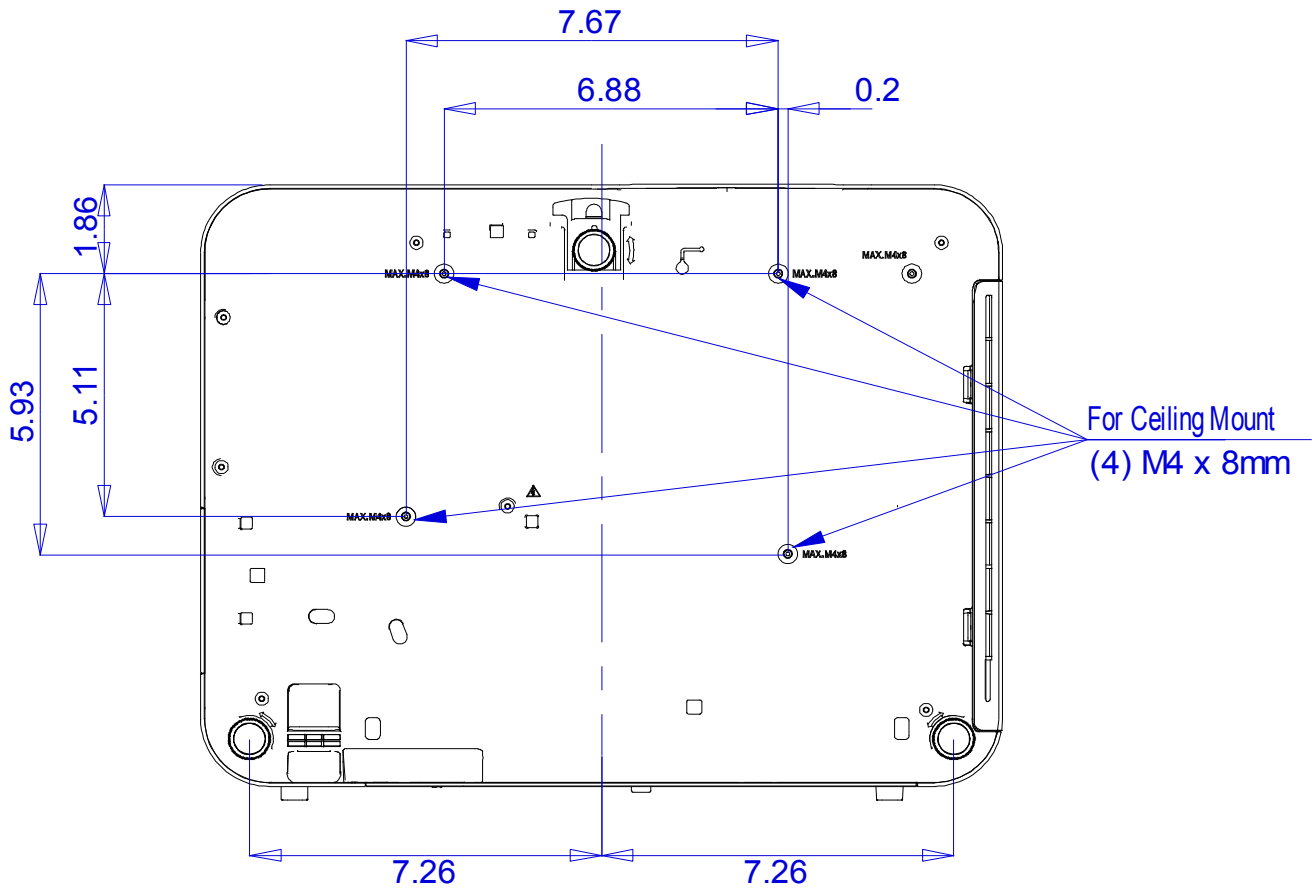

6647W/6647WU/6655W/6655WU Installation Guide

Desktop and Ceiling Mount or Dukane mount PRG-UNV.

Rev 1.0

Input Panel



Control Panel

6647W/6647WU/6655W/6655WU Installation Guide

Desktop and Ceiling Mount

Rev 1.0

PC Control Codes


Function	Code Data								
POWER ON	02H	00H	00H	00H	00H	02H			
POWER OFF	02H	01H	00H	00H	00H	03H			
INPUT SELECT Computer	02H	03H	00H	00H	02H	01H	01H	09H	
INPUT SELECT HDMI1	02H	03H	00H	00H	02H	01H	A1H	A9H	
INPUT SELECT HDMI2	02H	03H	00H	00H	02H	01H	A2H	AAH	
INPUT SELECT Video	02H	03H	00H	00H	02H	01H	06H	0EH	
INPUT SELECT Computer	02H	03H	00H	00H	02H	01H	01H	09H	
INPUT SELECT HDBaseT	02H	03H	00H	00H	02H	01H	BFH	C7H	
PICTURE MUTE ON	02H	10H	00H	00H	00H	12H			
PICTURE MUTE OFF	02H	11H	00H	00H	00H	13H			
SOUND MUTE ON	02H	12H	00H	00H	00H	14H			
SOUND MUTE OFF	02H	13H	00H	00H	00H	15H			
AUTO ADJUST	02H	0FH	00H	00H	02H	05H	00H	18H	

Cable Connection

Communication Protocol:

- Baud Rate: 38400 bps (for cable lengths longer than 20', it is recommended changing to 9600 bps in setup menu)
- Data Length: 8 bits
- Parity: No Parity
- Stop Bit: One bit
- X on/off: None
- Communications: Full duplex

PC Control Connector (D-Sub 9P)

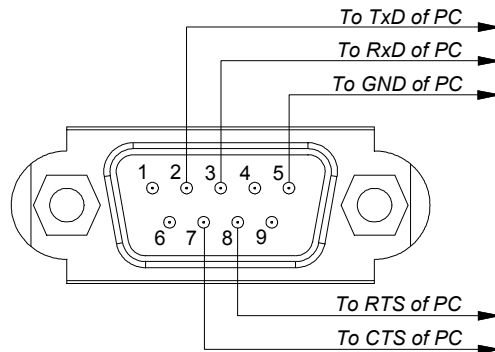

NOTE 1 : Pins 1, 4, 6, and 9 are used inside the projector.

NOTE 2 : For long cable runs it is recommended to set communication speed within the projector to 9600 bps.

NOTE 3 : Jumper "Request to Send" and "Clear to Send" together on both ends of the cable to simplify cable connection.